

Driving Capacitive Loads

Driving Capacitive Loads with Trek Amplifiers

In applications which involve driving capacitive loads, the useful bandwidth of the amplifier is often limited by the peak output current capability of the amplifier rather than the amplifier's AC gain bandwidth characteristics.

Engineers at Trek have designed many amplifiers with various voltage and current levels which can be used to drive capacitive loads. The table at the bottom of this page lists selected Trek Amplifiers with their voltage and current ranges. The internal capacitance of each amplifier is in the X pF (pico farad) column. To determine which Trek Model amplifier is most suitable for your application:

1. Substitute the peak voltage that will be applied to your load into the appropriate equation for driving capacitive loads with sine, triangle, or square waves. Use the table below to select the Trek amplifier with the appropriate voltage or current characteristics.
2. Select the correct internal output capacitance value for the selected Trek amplifier from the X pF (pico farad) column and substitute the value into the X pF variable of the equation.
3. Substitute the capacitive value of your load (C load) into the equation.
4. Substitute the desired frequency f or rise time dt (square wave) of the output waveform into the equation.
5. Solve for the peak current needed from the amplifier.


If the calculated peak current is equal to or less than the peak current range of the amplifier, the Trek amplifier will not be bandwidth limited due to output current limitations. For example, if the calculated peak current is equal to or less than 20 mA, the Model 20/20C will not be bandwidth limited due to output current limitations.

To help you select the appropriate amplifier, download the following application:

Driving Capacitive Loads with Sine Waves

$$i = (C_{load} + X \text{ pF}) 2\pi f V_{peak}$$


where: i = the peak current needed from the amplifier
 C_{load} = the load capacitance
 $X \text{ pF}$ = the internal output capacitance of the amplifier
 f = the maximum output frequency
 V_{peak} = the peak voltage applied to the capacitive load



Driving Capacitive Loads with Triangle Waves

$$i = 4 f (C_{load} + X \text{ pF}) V_{peak}$$


where: i = the peak current needed from the amplifier
 C_{load} = the load capacitance
 $X \text{ pF}$ = the internal output capacitance of the amplifier
 f = the maximum output frequency
 V_{peak} = the peak voltage applied to the capacitive load



Driving Capacitive Loads with Square Waves


$$i = (C_{load} + X \text{ pF}) dV/dt$$

where: i = the peak current needed from the amplifier
 C_{load} = the load capacitance
 $X \text{ pF}$ = the internal output capacitance of the amplifier
 dV = the peak value of the square wave
 dt = the rise time required
 dV/dt = the slope of the rise/fall time



(See reverse side for Amplifier Internal Capacitance Chart)

**TREK, INC. 11601 Maple Ridge Road • Medina, NY 14103 • 800-FOR TREK
 585-798-3140 • 585-798-3106 (fax) • www.trekinc.com • sales@trekinc.com**

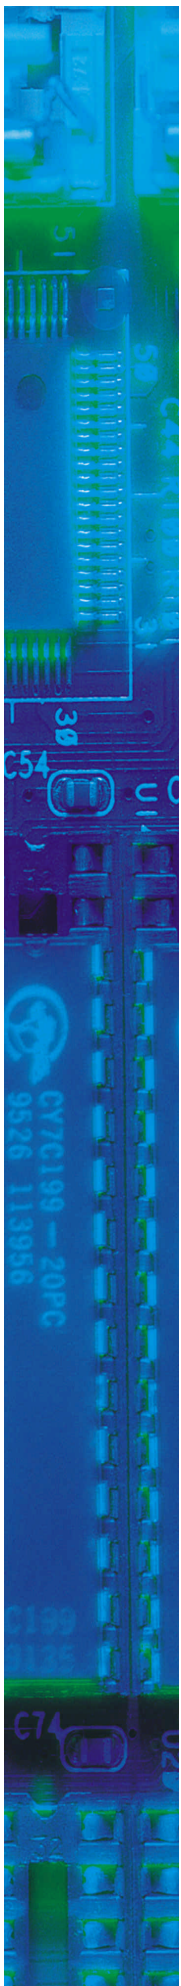

TREK Amplifier Internal Capacitance Chart

Model	X pf	Output Current	Output Voltage
30/20	100 pF	±20 mA DC or peak AC	±30 kV DC or peak AC
20/20C	60 pF	±20 mA DC or peak AC	±20 kV DC or peak AC
10/40A	60 pF	±40 mA DC or peak AC	±10 kV DC or peak AC
664	110 pF	±20 mA DC or peak AC	±10 kV DC or peak AC
10/10B	40 pF	±10 mA DC or peak AC	±10 kV DC or peak AC
610E	66 pF	±2 mA DC or peak AC	±10 kV DC or peak AC
609A-3	66 pF	±2 mA DC or peak AC	±10 kV DC or peak AC
5/80	80 pF	±80 mA DC or peak AC	±5 kV DC or peak AC
609E-6	50 pF	±20 mA DC or peak AC	±4 kV DC or peak AC
PZD2000	800 pF	±200 mA DC or ±400 mA peak AC	±2 kV DC or peak AC
PZD700 (±700 volt range)	665 pF	±100 mA DC or peak AC	±700 V DC or peak AC
PZD700 (1.4 k volt ranges)	500 pF	±50 mA DC or peak AC	+1.4 kV DC or peak AC -1.4 kV DC or peak AC
PZD700 M/S (±700 volt range)	1330 pF	±200 mA DC or peak AC	±700 V DC or peak AC
PZD700 M/S (1.4 k volt ranges)	1000 pF	±100 mA DC or peak AC	+1.4 kV DC or peak AC -1.4 kV DC or peak AC
601C	400 pF	±10 mA DC ±20 mA peak AC	±500 V DC or peak AC + 1 kV DC or peak AC - 1 kV DC or peak AC
PZD350 (±350 volt range)	665 pF	±200 mA DC or peak AC	±350 V DC or peak AC
PZD350 (700 volt ranges)	400 pF	±100 mA DC or peak AC	+700 V DC or peak AC -700 V DC or peak AC
PZD350 M/S (±350 volt range)	1330 pF	±400 mA DC or peak AC	±350 V DC or peak AC
PZD350 M/S (700 volt ranges)	800 pF	±100 mA DC or peak AC	+700 V DC or peak AC -700 V DC or peak AC
603	800 pF	±40 mA DC ±80 mA peak AC	±125 V DC or peak AC +250 V AC or peak AC -250 V AC or peak AC

